


CONTOURS AS POSSIBLE. THIS INCLUDES ALL FILLED OR UNPROTECTED SLOPES CREATED DURING CONSTRUCTION. NOT NECESSARILY REFLECTED ON THE FINAL PLANS. CURVE THE ENDS OF THE FENCE UP INTO THE SLOPE. REMOVE SEDIMENT WHEN ACCUMULATED TO HALF THE HEIGHT OF THE FENCE. SILT FENCES ARE TO BE MAINTAINED UNTIL SLOPES ARE STABILIZED.

3. WHEN TWO SECTIONS OF FILTER CLOTH ADJOIN EACH OTHER, THEY SHALL BE OVERLAPPED BY 6", FOLDED AND STAPLED.

SILT FENCE DETAIL

REVISED 08/01/2014

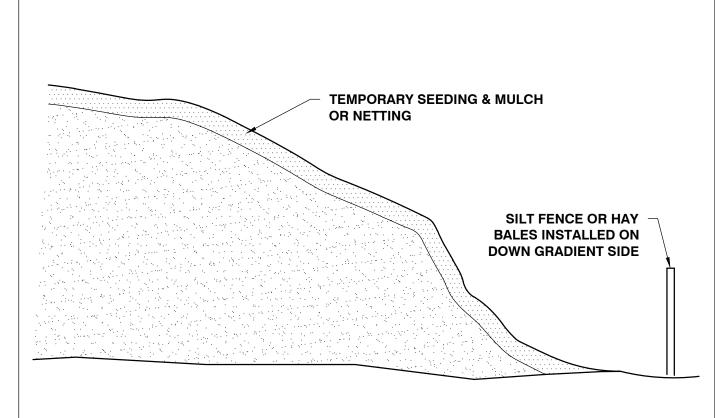


TEMPORARY STOCKPILE DETAIL


REVISED 08/01/2014


WOVEN WIRE FENCE (MIN. 14 GAUGE w/MAX. 6" MESH SPACING) FILTER FABRIC TO BE POST MIRAFI 100X OR APPROVED **EQUAL POST SPACING** 2½ X 2½ WOOD 2.5' METAL POST 10' 4 x 4 WOOD FILTER FABRIC TO BE CLIPPED, BACKFILLED AND TAMPED 8" BELOW GRADE STEEL OR WOOD STAKES (SEE CHART AT RIGHT) NOTES: 1. WOVEN WIRE FENCE TO BE FASTENED SECURELY TO FENCE POSTS WITH WIRE TIES. WIRE FENCE REINFORCEMENT REQUIRED WITHIN 100 FT UPSLOPE OF RECEIVING 2. INSTALL MIRAFI ENVIROFENCE, OR APPROVED EQUAL OR AS DETAILED HEREIN. 3. INSTALL SILT FENCES AT TOES OF ALL UNPROTECTED SLOPES AND AS PARALLEL TO CONTOURS AS POSSIBLE. THIS INCLUDES ALL FILLED OR UNPROTECTED SLOPES CREATED DURING CONSTRUCTION, NOT NECESSARILY REFLECTED ON THE FINAL PLANS. CURVE THE ENDS OF THE FENCE UP INTO THE SLOPE. REMOVE SEDIMENT WHEN ACCUMULATED TO HALF THE HEIGHT OF THE FENCE. SILT FENCES ARE TO BE MAINTAINED UNTIL SLOPES ARE STABILIZED. 4. WHEN TWO SECTIONS OF FILTER CLOTH ADJOIN EACH OTHER, THEY SHALL BE OVERLAPPED BY 6", FOLDED AND STAPLED.

REINFORCED SILT FENCE DETAIL

REVISED 09/24/2014

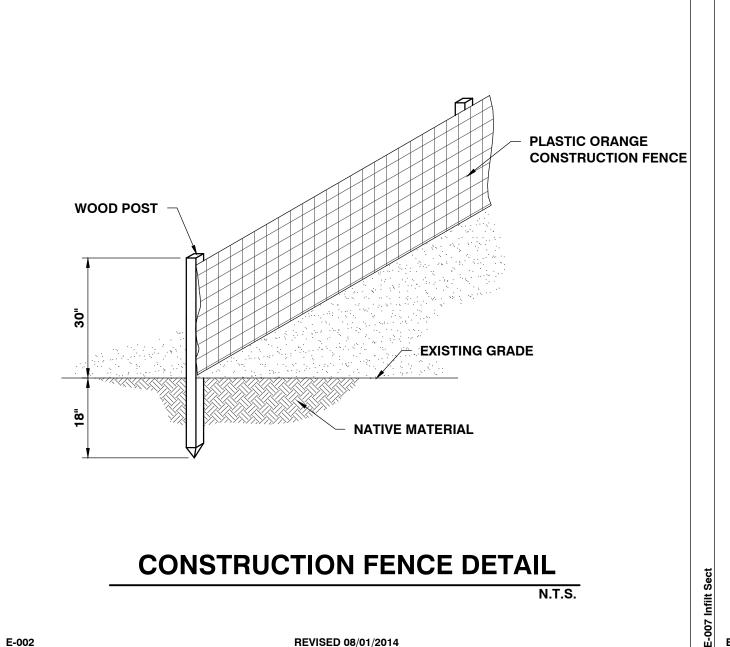

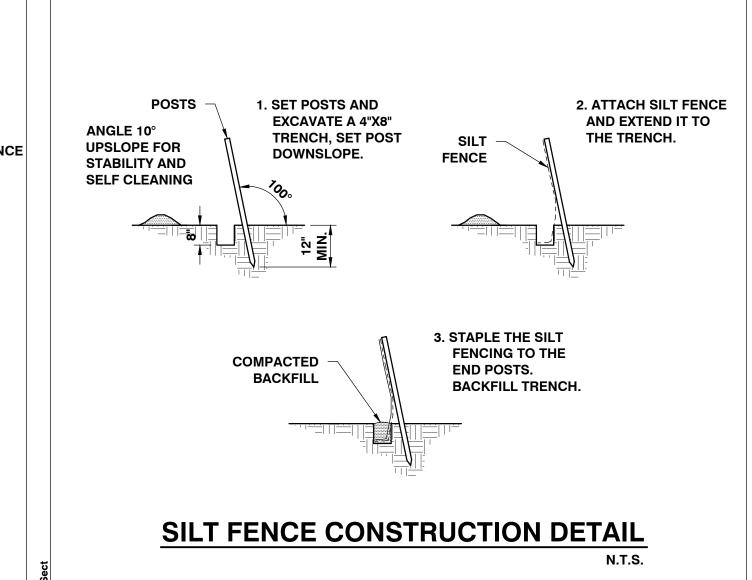



CIVIL ENGINEERING ASSOCIATES, INC. 10 MANSFIELD VIEW LANE, SOUTH BURLINGTON, VT 05403 802-864-2323 FAX: 802-864-2271 web: www.cea-vt.com

COPYRIGHT © 2019 - ALL RIGHTS RESERVED DRAWN SAL CHECKED DSM APPROVED DSM

OWNER:

HAYSTACK CROSSING, LLC c/o JOSEPH BISSONETTE

68 RANDALL STREET SOUTH BURLINGTON, VT 05403

APPLICANT:


BLACKROCK CONSTRUCTION, LLC


68 RANDALL STREET SOUTH BURLINGTON, VT 05403

PROJECT:


HAYSTACK **CROSSING**

SHELBURNE FALLS ROAD **VERMONT ROUTE 116** HINESBURG, VERMONT 05461

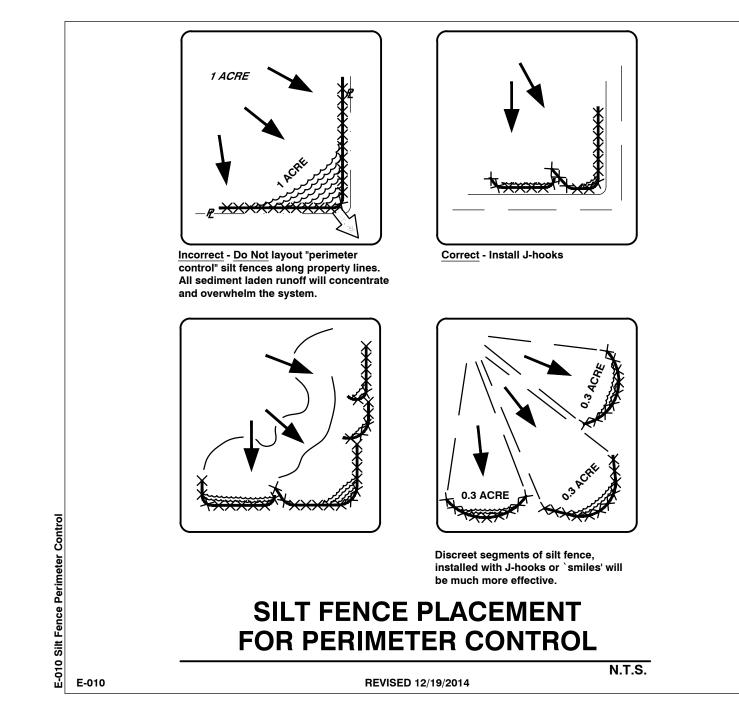

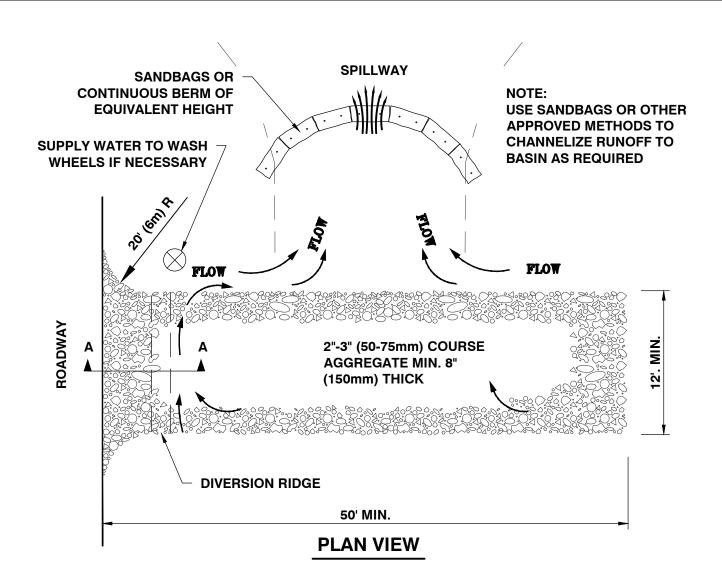

ய் E-004

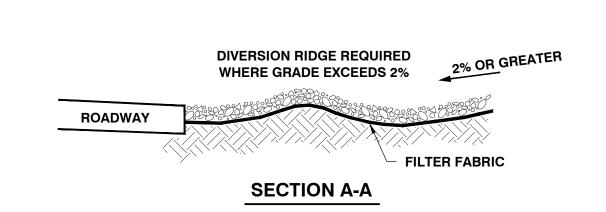

REVISED 08/01/2014

NOTES:

- 1. THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION THAT WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHT-OF-WAYS. THIS MAY REQUIRE TOP DRESSING, REPAIR AND/OR CLEAN OUT OF ANY MEASURES USED TO TRAP SEDIMENT.
- 2. WHEN NECESSARY, WHEELS SHALL BE CLEANED PRIOR TO ENTRANCE ONTO PUBLIC RIGHT-OF-WAY.
- 3. WHEN WASHING IS REQUIRED, IT SHALL BE DONE ON AN AREA STABILIZED WITH CRUSHED STONE THAT DRAINS INTO AN APPROVED SEDIMENT TRAP OR SEDIMENT

STABILIZED CONSTRUCTION ENTRANCE N.T.S.

REVISED 08/01/2014

DATE	CHECKED	REVISION
11/22/19	DSM	TOWN RESUBMITTAL
1/10/20	DSM	UPDATE PER TOWN COMMENTS
3/4/22	DSM	REV. PER CONDITIONS OF APPROVAL

EPSC NARRATIVE & **DETAILS**

DRAWING NUMBER OCT. 4, 2019

SCALE

AS SHOWN

PROJ. NO. 13127